


# MicroCue<sup>2</sup>

**MicroCue<sup>2</sup>** is the next generation of compact presentation cueing system, designed for the presenter on the move. Featuring dual USB ports for the simultaneous cueing of multiple versions of a PowerPoint presentation, MicroCue<sup>2</sup> utilizes the renowned Interspace Industries wireless remote cueing system which allows for full presenter mobility on stage. The control unit displays colour coded cues via a visual display as well as producing audible cue sounds which can be monitored via headphones if required. The line-of-sight range in an enclosed venue typically exceeds 75m.

The small, portable and ruggedly designed MicroCue<sup>2</sup> can be set up in only minutes and is powered via either of the USB connections to a computer or an external power pack (optional accessory). The presenter can signal either 'forward', 'back' or 'go to black' cues during their presentation and by using the USB (1.1) interfaces they can even directly control either or both of the USB ports when connected to computers running PowerPoint presentations if required. This provides for the simultaneous control of a main and back-up version, translation version or a special notes version of the presentation if required. The remote control cue buttons can also be programmed to control the presentation in specific ways (e.g. return to the beginning of the presentation, or jump to a specific slide number perhaps).



## *Professional Presentations on the Move!*

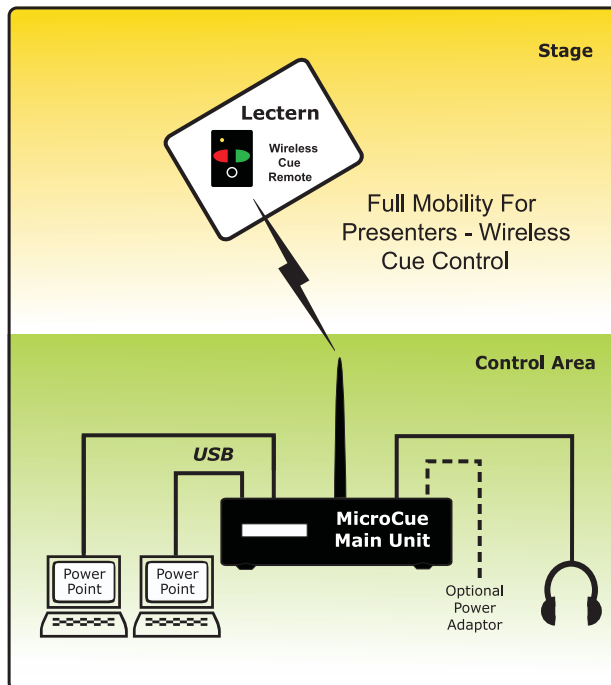

### Main Features

- Tri-button presentation control (with tactile feedback) via wireless handset
- Dual USB interface ports for direct control of up to two computers
- Audible cue via headphone jack socket
- Rugged portable design
- Multicolour visual cues
- Simple setup
- Fully CE and FCC compliant

**3 Year Limited Factory Warranty**

### Interspace Industries LLC

4650 S. Butterfield Dr., Tucson, AZ  
call: (520) 689-4237 fax: (520) 844-9020  
email: [moreinfo@i2llc.us](mailto:moreinfo@i2llc.us) web: [www.interspaceind.com](http://www.interspaceind.com)



## Specifications

### Signals:

Europe: RF 433 MHz  
 USA & Canada: RF 433 MHz  
 RF Signal type: FSK modulation

### Connections:

BNC for detachable aerial  
 Mini jack socket for audio output  
 PS2 style keyboard connector for keyboard programming  
 2 x B-type USB (1.1) connector  
 DC socket for external power supply

### Accessories included:

1 x 3-button wireless remote  
 2 x USB series A-B cables  
 1 x Aerial

### Required user parts:

Mini jack stereo headphones if discreet tone is required  
 12V DC 500mA power pack

### Dimensions and weights mm (inch):

#### Main Unit

DxWxH: 84 (3 3/10") x 125 (4 9/10") (inc BNC)  
 x 41 (1 6/10") (inc feet)  
 Weight: 210g (7.4oz)

#### Transmitter

DxWxH: 25 (1") x 63 (2 1/2") x 93 (3 6/10")  
 Weight: 90g (3.2oz)

#### Aerial

L x Dia: 142mm (5 9/16") x 14mm (17/32")  
 (433 MHz)  
 Weight: 25g (1oz)

